

## 96631543 POPPACK LED 4500-840 HF E3 L1200

LED 36W PP12MO-840	IP20	IK03	⏚	CE	EAC	⚡	⚡	650°C	T <sub>a</sub> 0 +25	
--------------------	------	------	---	----	-----	---	---	-------	-------------------------	--


### PopPack

Batten LED luminaire. Electronic, fixed output control gear with 3 hour, manual test, emergency lighting circuit. Body: coated, formed steel, white (RAL9016). End caps: injection moulded polycarbonate, white. Diffuser: textured opal acrylic. Electrical connection via (3 + 3) x 2 x 2.5mm<sup>2</sup> terminal block. Complete with 4000K LED


Dimensions: 1168 x 60 x 74 mm  
 Luminaire input power: 35.6 W  
 Luminaire luminous flux: 4650 lm  
 Luminaire efficacy: 131 lm/W  
 Weight: 2 kg



TLG\_POPL\_F\_PDB\_EMPTY.jpg

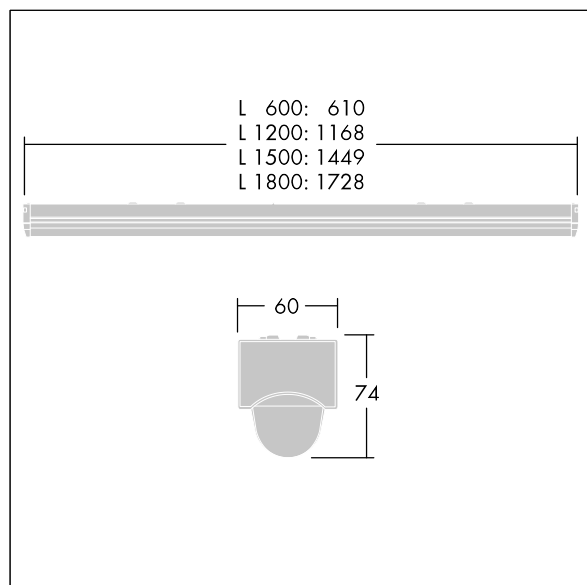

TLG\_POPL\_M\_LD1.wmf

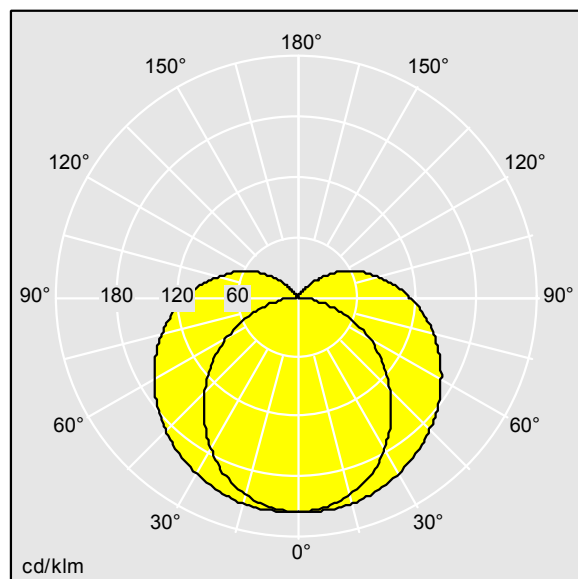

TLG\_SP\_0043748.idt

Lamp position: STD - standard  
 Light Source: LED  
 Luminaire luminous flux\*: 4650 lm  
 Total emergency luminous flux: 450 lm  
 Luminaire efficacy\*: 131 lm/W  
 Colour Rendering Index min.: 80  
 Ballast 1: 1 x 28003376 LC 35/200-350/121 flexCC Ip  
 SNC3  
 Ballast 2: 1 x 89800563 EM converterLED BASIC 204  
 NiCd/NiMH 250V

Correlated colour temperature: 4000 Kelvin  
 Chromaticity tolerance (initial MacAdam): 3  
 Rated median useful life\*:  
 L80 50000h at 25°C  
 Luminaire input power\*: 35.6 W Power factor = 0.95  
 Charging power: 4 W  
 Dimming: FO  
 Maintenance category: D - Enclosed IP2X  
 LOR: 1,00 ULOR: 0,17 DLOR: 0,83

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
 © Thorn Lighting