

96631556 POPPACK LED 5000-840 HFI L1500

LED 36W PP15LO-840	IP20	IK03	⊕	CE	⚡	EAC	⚡	⚡	650°C	T _a -20 +25	
--------------------	------	------	---	----	---	-----	---	---	-------	---------------------------	--


PopPack

Batten LED luminaire. Electronic, DALI dimmable control gear. Body: coated, formed steel, (RAL9016). End caps: injection moulded polycarbonate,. Diffuser: textured opal acrylic. Electrical connection via (3 + 3) x 2 x 2.5mm² terminal block. Complete with 4000K LED


Dimensions: 1449 x 60 x 74 mm
Luminaire input power: 36 W
Luminaire luminous flux: 4900 lm
Luminaire efficacy: 136 lm/W
Weight: 1.7 kg



TLG_POPL_F_PDB_EMPTY.jpg

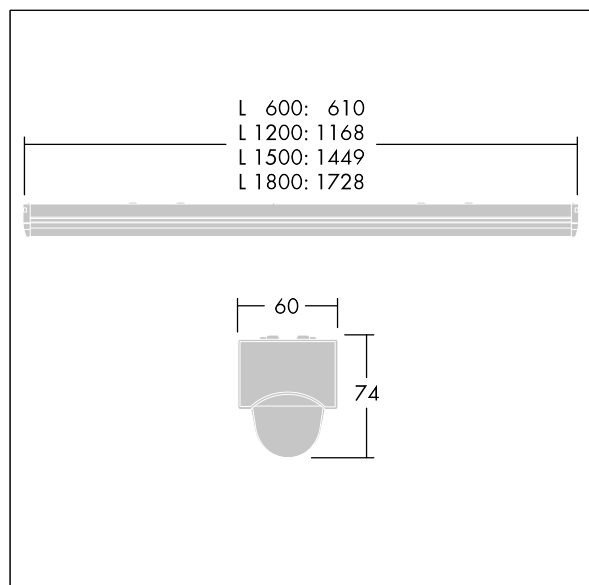

TLG_POPL_M_LD1.wmf

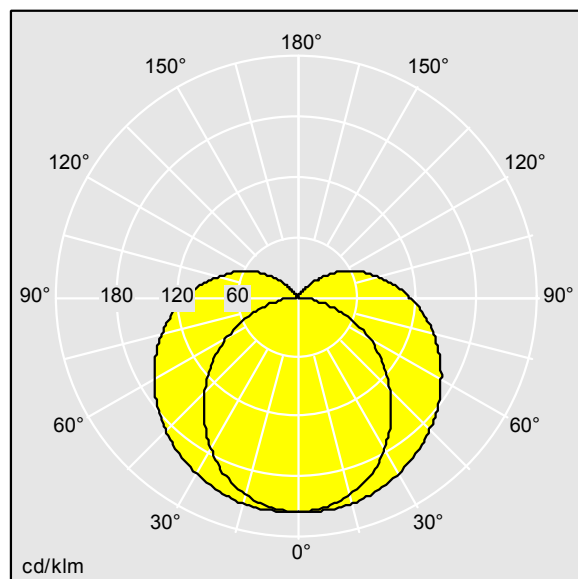

TLG_SP_0043752.ltd

Lamp position: STD - standard
Light Source: LED
Luminaire luminous flux*: 4900 lm
Luminaire efficacy*: 136 lm/W
Colour Rendering Index min.: 80
Ballast: 1 x 28000657 LCA 75W 100-400mA one4all Ip
PRE
Correlated colour temperature: 4000 Kelvin
LOR: 1,00 ULOR: 0,17 DLOR: 0,83

Chromaticity tolerance (initial MacAdam): 3
Rated median useful life*:
L80 50000h at 25°C
Luminaire input power*: 36 W Power factor = 0.99
Standby Power*: 0.15 W
Dimming: DA2 dimmable to 1%
Maintenance category: D - Enclosed IP2X
Total harmonic distortion (THD): 13.10 %

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting