

## 96631558 POPPACK LED 6000-840 HF L1500

LED 53W PP15MO-840	IP20	IK03	⏏	CE	⚡	EAC	⚡	⚡	650°C	T <sub>a</sub> -20 +25	
--------------------	------	------	---	----	---	-----	---	---	-------	---------------------------	--


### PopPack

Batten LED luminaire. Electronic, fixed output control gear.  
Body: coated, formed steel, white (RAL9016). End caps: injection moulded polycarbonate, white. Diffuser: textured opal acrylic. Electrical connection via 3 x 2 x 2.5mm<sup>2</sup> terminal block. Complete with 4000K LED


Dimensions: 1449 x 60 x 74 mm  
Luminaire input power: 52.8 W  
Luminaire luminous flux: 6400 lm  
Luminaire efficacy: 121 lm/W  
Weight: 1.7 kg



TLG\_POPL\_F\_PDB\_EMPTY.jpg

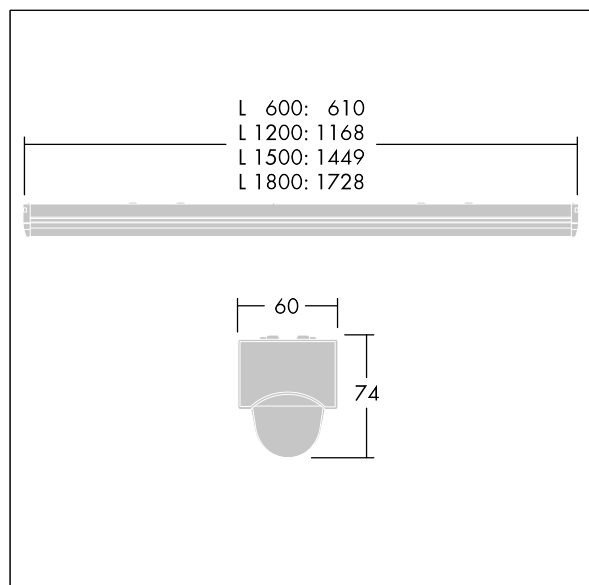

TLG\_POPL\_M\_LD1.wmf

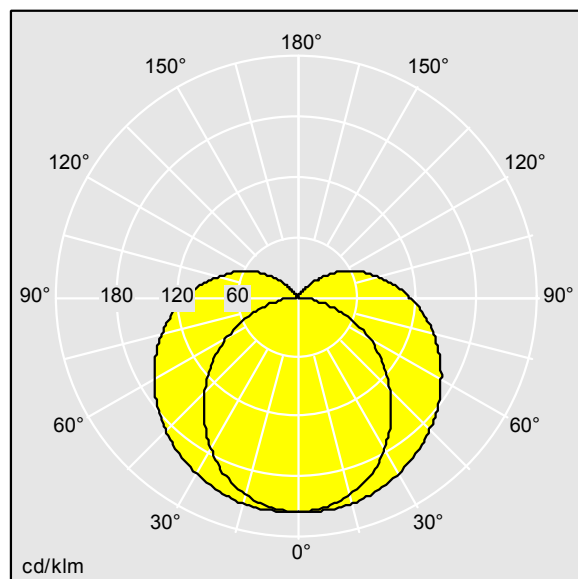

TLG\_SP\_0043754.ltd

Lamp position: STD - standard  
Light Source: LED  
Luminaire luminous flux\*: 6400 lm  
Luminaire efficacy\*: 121 lm/W  
Colour Rendering Index min.: 80  
Ballast: 1 x 28003378 LC 65/200-350/210 flexCC Ip  
SNC3  
LOR: 1,00 ULOR: 0,17 DLOR: 0,83

Correlated colour temperature: 4000 Kelvin  
Chromaticity tolerance (initial MacAdam): 3  
Rated median useful life\*:  
L80 50000h at 25°C  
Luminaire input power\*: 52.8 W Power factor = 0.95  
Dimming: FO  
Maintenance category: D - Enclosed IP2X

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting