

96631559 POPPACK LED 6000-840 HF E3 L1500

LED 53W PP15MO-840	IP20	IK03							650°C	T _a 0 +25	
--------------------	------	------	--	--	--	--	--	--	-------	-------------------------	--


PopPack

Batten LED luminaire. Electronic, fixed output control gear with 3 hour, manual test, emergency lighting circuit. Body: coated, formed steel, white (RAL9016). End caps: injection moulded polycarbonate, white. Diffuser: textured opal acrylic. Electrical connection via (3 + 3) x 2 x 2.5mm² terminal block. Complete with 4000K LED


Dimensions: 1449 x 60 x 74 mm
 Luminaire input power: 52.8 W
 Luminaire luminous flux: 6400 lm
 Luminaire efficacy: 121 lm/W
 Weight: 2.3 kg



TLG_POPL_F_PDB_EMPTY.jpg

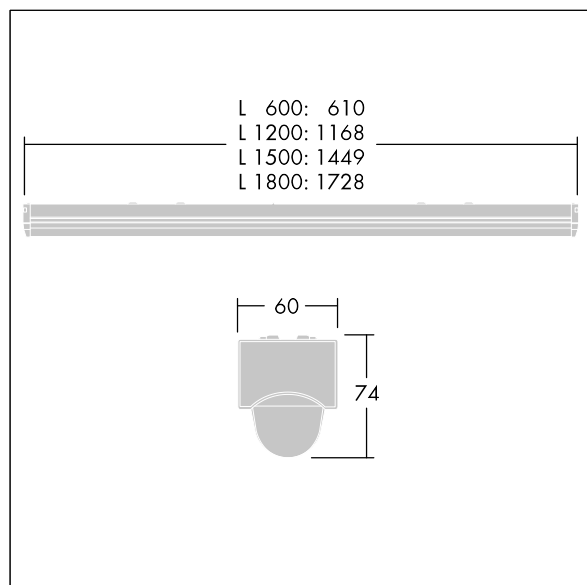

TLG_POPL_M_LD1.wmf

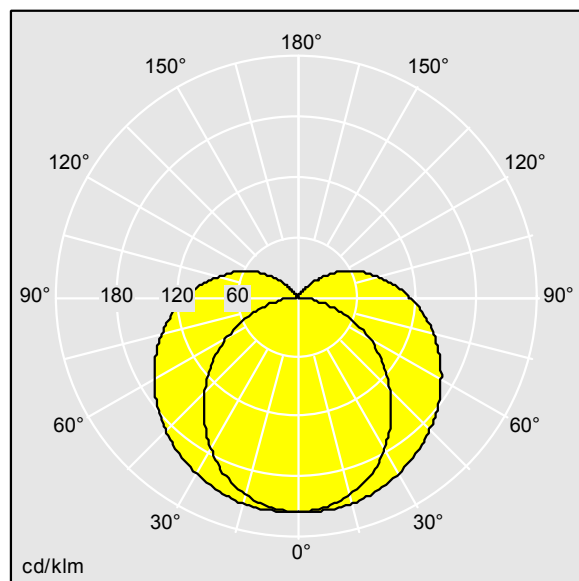

TLG_SP_0043754.ltd

Lamp position: STD - standard
 Light Source: LED
 Luminaire luminous flux*: 6400 lm
 Total emergency luminous flux: 425 lm
 Luminaire efficacy*: 121 lm/W
 Colour Rendering Index min.: 80
 Ballast 1: 1 x 28003378 LC 65/200-350/210 flexCC Ip
 SNC3
 Ballast 2: 1 x 89800563 EM converterLED BASIC 204
 NiCd/NiMH 250V

Correlated colour temperature: 4000 Kelvin
 Chromaticity tolerance (initial MacAdam): 3
 Rated median useful life*:
 L80 50000h at 25°C
 Luminaire input power*: 52.8 W Power factor = 0.95
 Charging power: 4 W
 Dimming: FO
 Maintenance category: D - Enclosed IP2X
 LOR: 1,00 ULOR: 0,17 DLOR: 0,83

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
 © Thorn Lighting