

PopPack

THORN

96631560 POPPACK LED 6000-840 HFI L1500

LED 53W PP15MO-840	IP20	IK03		CE		EAC			650°C	Ta-20 +25
--------------------	------	------	--	----	--	-----	--	--	-------	--------------

PopPack

Batten LED luminaire. Electronic, DALI dimmable control gear. Body: coated, formed steel, (RAL9016). End caps: injection moulded polycarbonate. Diffuser: textured opal acrylic. Electrical connection via (3 + 3) x 2 x 2.5mm² terminal block. Complete with 4000K LED


Dimensions: 1449 x 60 x 74 mm
Luminaire input power: 52.8 W
Luminaire luminous flux: 6400 lm
Luminaire efficacy: 121 lm/W
Weight: 1.7 kg



TLG_POPL_F_PDB_EMPTY.jpg



TLG_POPL_M_LD1.wmf

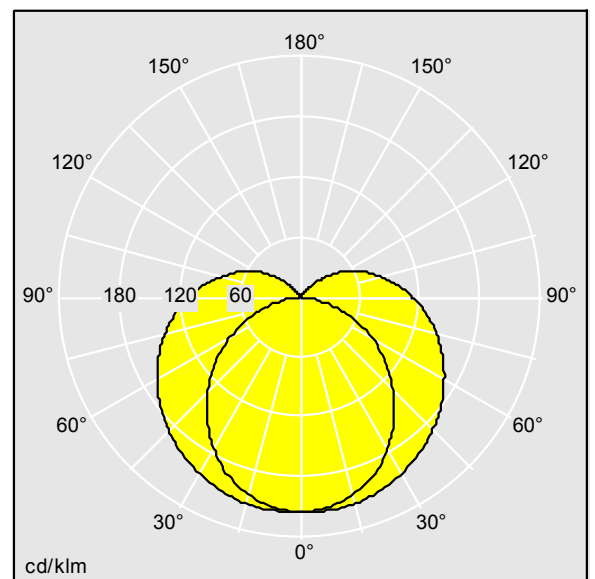

TLG_SP_0043754.ltd

Lamp position: STD - standard
Light Source: LED
Luminaire luminous flux*: 6400 lm
Luminaire efficacy*: 121 lm/W
Colour Rendering Index min.: 80
Ballast: 1 x 28000657 LCA 75W 100-400mA one4all Ip PRE
Correlated colour temperature: 4000 Kelvin
LOR: 1,00 ULOR: 0,17 DLOR: 0,83

Chromaticity tolerance (initial MacAdam): 3
Rated median useful life*:
L80 50000h at 25°C
Luminaire input power*: 52.8 W Power factor = 0.99
Standby Power*: 0.15 W
Dimming: DA2 dimmable to 1%
Maintenance category: D - Enclosed IP2X
Total harmonic distortion (THD): 9.60 %

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting