

96631569 POPPACK LED 6500-840 HFI E3 L1800

LED 54W PP18LO-840	IP20	IK03	⊕	CE	⚡	EAC	⚙️	⚙️	⚙️	650°C	T _a 0 +25
--------------------	------	------	---	----	---	-----	----	----	----	-------	-------------------------


PopPack

Batten LED luminaire. Electronic, DALI dimmable control gear with 3 hour, manual test, emergency lighting circuit. Body: coated, formed steel, (RAL9016). End caps: injection moulded polycarbonate, white. Diffuser: textured opal acrylic. Electrical connection via (3 + 3) x 2 x 2.5mm² terminal block. Complete with 4000K LED


Dimensions: 1728 x 60 x 74 mm
 Luminaire input power: 54 W
 Luminaire luminous flux: 6800 lm
 Luminaire efficacy: 126 lm/W
 Weight: 2.5 kg



TLG_POPL_F_PDB_EMPTY.jpg

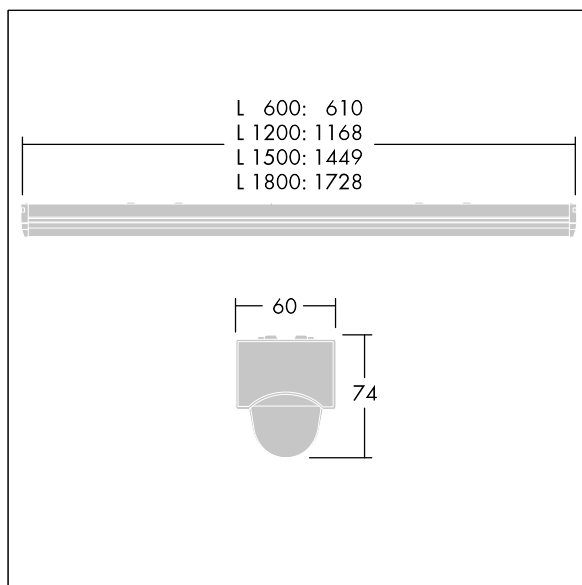

TLG_POPL_M_LD1.wmf

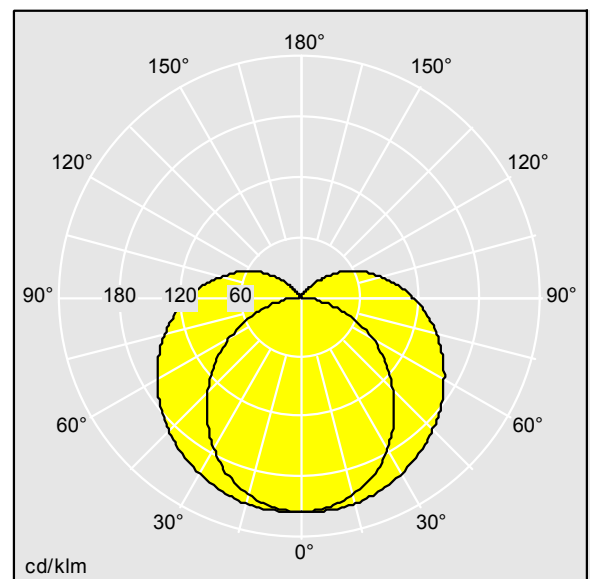

TLG_SP_0043758.ltd

Lamp position: STD - standard
 Light Source: LED
 Luminaire luminous flux*: 6800 lm
 Total emergency luminous flux: 425 lm
 Luminaire efficacy*: 126 lm/W
 Colour Rendering Index min.: 80
 Ballast 1: 1 x 28000657 LCA 75W 100-400mA one4all
 Ip PRE
 Ballast 2: 1 x 89800563 EM converterLED BASIC 204
 NiCd/NiMH 250V
 LOR: 1,00 ULOR: 0,17 DLOR: 0,83

Correlated colour temperature: 4000 Kelvin
 Chromaticity tolerance (initial MacAdam): 3
 Rated median useful life*:
 L80 50000h at 25°C
 Luminaire input power*: 54 W Power factor = 0.99
 Standby Power*: 0.15 W
 Charging power: 4 W
 Dimming: DA2 dimmable to 1%
 Maintenance category: D - Enclosed IP2X

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.