

PopPack

THORN

96631582 POPPACK LED 4500-840 PIR L1200

LED 36W PP12MO-840	IP20	IK03							650°C	Ta -20 +25
--------------------	------	------	--	--	--	--	--	--	-------	---------------


PopPack

Batten LED luminaire with detachable LED engine.
Electronic, fixed output control gear. Body: coated, formed steel, white (RAL9016). End caps: injection moulded polycarbonate, white. Diffuser: textured opal acrylic.
Electrical connection via 2 x (3 x 2 x 2.5mm²) terminal blocks. Including pre-wired PIR sensor with switch ON/OFF functionality. Enabled control of slave luminaire from one master luminaire equipped with PIR sensor by means of hard wiring. 3 core wiring sufficient for the through wiring of the products, max. load per circuit = 2A. Complete with 4000K LED.


Dimensions: 1168 x 60 x 74 mm
Luminaire input power: 35.6 W
Luminaire luminous flux: 4650 lm
Luminaire efficacy: 131 lm/W
Weight: 1.4 kg



TLG_POPL_F_PDB_SENS.jpg

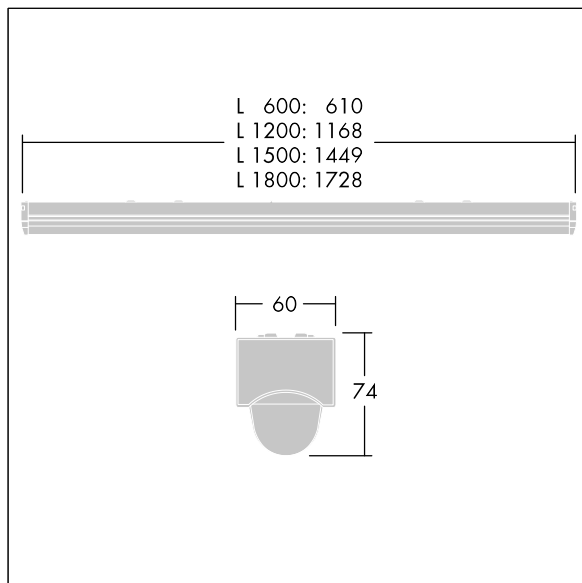

TLG_POPL_M_LD1.wmf

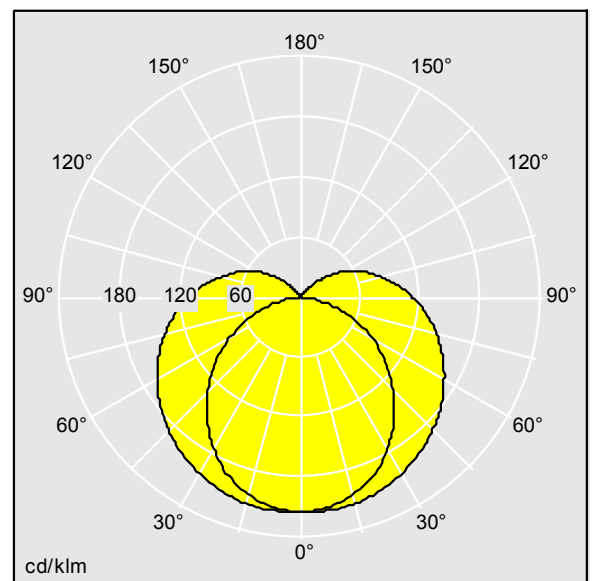

TLG_SP_0043748.idt

Lamp position: STD - standard
Light Source: LED
Luminaire luminous flux*: 4650 lm
Luminaire efficacy*: 131 lm/W
Colour Rendering Index min.: 80
Correlated colour temperature: 4000 Kelvin
LOR: 1,00 ULOR: 0,17 DLOR: 0,83

Chromaticity tolerance (initial MacAdam): 3
Rated median useful life*:
L80 50000h at 25°C
Ballast: 1x HF_ Tridonic LC
Luminaire input power*: 35.6 W Power factor = 0.95
Dimming: FO
Maintenance category: D - Enclosed IP2X

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting