

Edge-Lit LED Flat Panels

Over 60% energy savings compared to traditional fluorescent

Edge-lit panel for complete uniformity across diffuser

High quality light guide designed to prevent yellowing

Delivering 110lm/W

SDCM <4


UGR19

IK06 rated


Suitable for installation in 15 & 24mm T-bar ceilings

AP-EN606033 & AP-EN123033 - IP44 rated from the front

AP-EN126055 - IP20 rated from the front

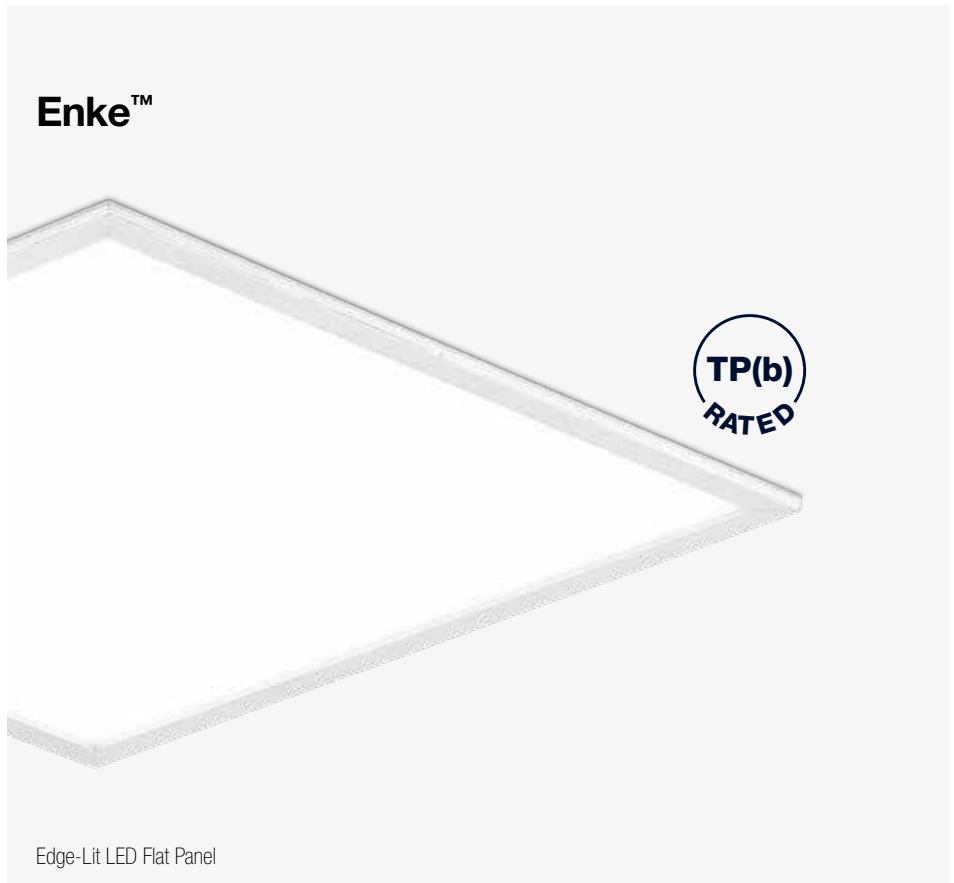

Edge-Lit LED Flat Panel

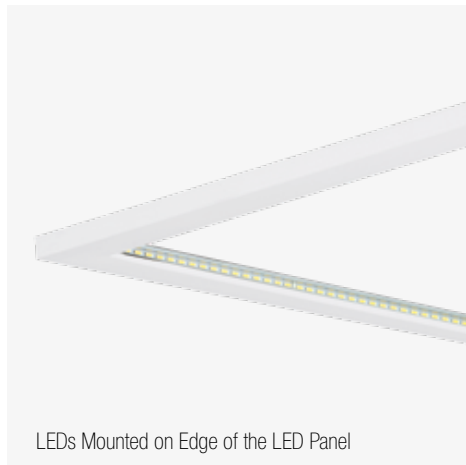

LEDs Mounted on Edge of the LED Panel



AP-ENLPEM2 Emergency Pack

Specification

Installation Type	Suspended, Recessed or Surface Mount
Input Voltage	220 - 240V
Luminaire Materials	Aluminium
Lifetime L70	50,000
CRI	>80
IP Rating	IP44 (AP-EN126055 - IP20)
Warranty	5 Years

Edge-Lit LED Flat Panels

Cat. No.	Watts	Colour	Lumens	Beam
600x600mm				
AP-EN606033*W/30	30W	3000K	3300lm	110°
AP-EN606033*W/40	30W	4000K	3300lm	110°
AP-EN606033*W/50	30W	5000K	3300lm	110°
1200x600mm				
AP-EN126055*W/30	50W	3000K	5500lm	110°
AP-EN126055*W/40	50W	4000K	5500lm	110°
AP-EN126055*W/50	50W	5000K	5500lm	110°
1200x300mm				
AP-EN123033*W/30	30W	3000K	3300lm	110°
AP-EN123033*W/40	30W	4000K	3300lm	110°
AP-EN123033*W/50	30W	5000K	3300lm	110°

Accessories

See Below for accessory information

*Add suffix **DA** for DALI or **V** for 1-10V dimmable. **Bluetooth** option available upon request



See Pg.146-147 for compatibility table

works with

.control

Bluetooth 0-10V
Inline Dimmer
See pg.123



Bluetooth 12.5A
On/Off Relay
See pg.123



Bluetooth DALI
Dimmable Controller
See pg.123



Surface Mount Box Kit



AP-PASMK6060
Surface Mount Kit
600x600mm



AP-PASMK1230
Surface Mount Kit
600x300mm



AP-PASMK1260
Surface Mount Kit
1200x600mm

Ceiling Recess Mount



AP-PACRM6060
Ceiling Recess Mount
600x600mm



AP-PACRM1230
Ceiling Recess Mount
1200x300mm



AP-PACRM1260
Ceiling Recess Mount
1200x600mm

Suspension Mounting Kit





AP-PASMKA
Adjustable Suspension Kit





AP-PASMKA



600x600mm 110° Beam 3300 Lumens




1200x600mm 110° Beam 5500 Lumens



AP-EN606033
(L) 595mm Length
(W) 595mm Width
(H) 10mm Height

AP-EN126055
(L) 1195mm Length
(W) 595mm Width
(H) 10mm Height

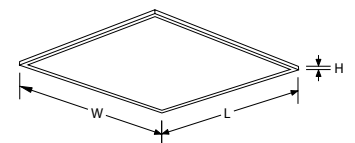

AP-EN123033
(L) 1195mm Length
(W) 295mm Width
(H) 10mm Height

*Technical specification may differ for Bluetooth version