



Crescent LED UGR<19 Surface Linear

Supplied c/w Integral Driver



- High specification fully enclosed linear luminaire
- Steel powder coated body for enhanced durability
- Polycarbonate diffuser and polished louvre for excellent photometric performance
- Suitable for surface mounting and suspension
- 42W exceeds performance of 2x35W T5
- 51W exceeds performance of 2x49W T5
- Ideal for most commercial and educational applications
- LED lifespan L70 54,000 hours

Powered by
TRIDONIC
enlightening your ideas

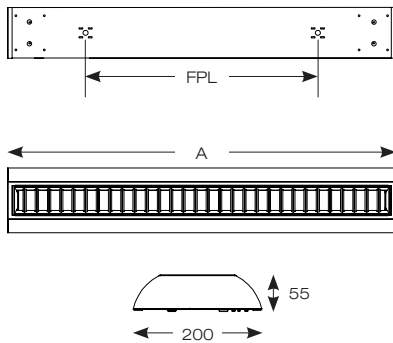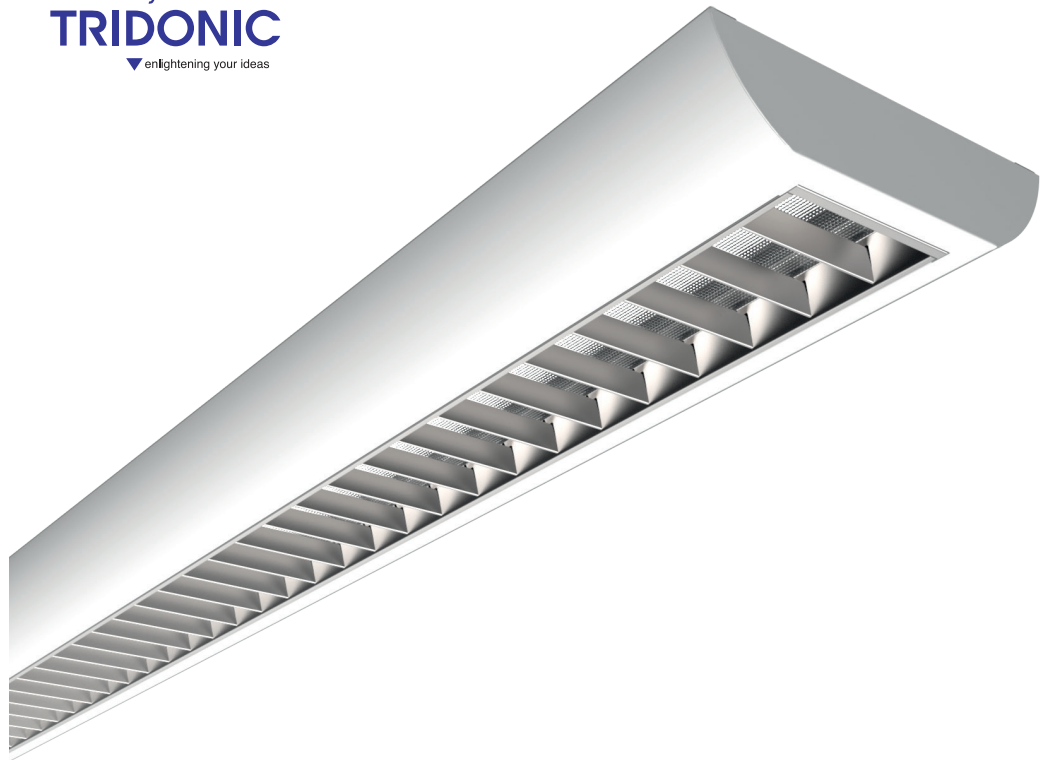

LED Information

Total (Watts)	42W
	51W
Lumens Delivered	
2X4	4497lm
2X5	5266lm
Lm/W	
2X4	107lm
2X5	103lm
CRI	Ra 80
CCT	4000K
Input	220V-240V
Hertz	50Hz
Operating Temp	-20°C to 50°C

Code	Lamp	Description	A	FPL
ACRESLED2X4	LED	42W - Cool White	1200	600
ACRESLED2X5	LED	51W - Cool White	1500	900

	/M3	Emergency
Option	/SM3	Self-test Emergency
	/DM3	DALI Emergency
	/DD	Digital Dimming (DD1/DD2/DD3/DD4)

Accessory ASK1	Suspension Kit 1.3m
-----------------------	---------------------

