



CorePro LEDtube InstantFit HF

CorePro LEDtube HF 600mm 9W840 T8 G

CorePro LEDtube InstantFit HF is an affordable LED solution suitable for replacing T8 fluorescent lamps. It provides a natural lighting effect for use in general lighting applications, as well as instant energy savings – an environmentally friendly solution.

Product data

General Information		Electrical	
Cap base	G13 [Medium Bi-Pin Fluorescent]	Lamp current (min.)	200 mA
Nominal lifetime (nom.)	30000 h	Starting time (nom.)	0.5 s
Switching cycle	50000X	Warm-up time to 60% light (nom.)	0.5 s
B50L70	30000 h	Voltage (Nom)	30-80 V
Light Technical		Temperature	
Colour code	840 [CCT of 4000K (841)]	T ambient (max.)	45 °C
Luminous flux (nom.)	800 lm	T ambient (min.)	-20 °C
Luminous flux (rated) (nom.)	800 lm	T storage (max.)	65 °C
Correlated colour temperature (nom.)	4000 K	T storage (min.)	-40 °C
Luminous efficacy (rated) (nom.)	89.00 lm/W	T-Case maximum (nom.)	60 °C
Colour consistency	<6	Controls and Dimming	
Color rendering index (nom.)	83	Dimmable	No
LLMF at end of nominal lifetime (nom.)	70 %	Mechanical and Housing	
Operating and Electrical		Product length	600 mm
Power (Rated) (Nom)	9 W		
Lamp current (max.)	400 mA		

CorePro LEDtube InstantFit HF

Approval and Application


Energy-saving product	Yes
Energy efficiency label (EEL)	A
Approval marks	CE marking RoHS compliance KEMA Keur certificate
Energy Consumption kWh/1000 h	12 kWh

Product Data

Full product code	871869665217600
Order product name	CorePro LEDtube HF 600mm 9W840 T8 G

EAN/UPC – product	8718696652176
Order code	65217600
Numerator – quantity per pack	1
Numerator – packs per outer box	10
Material no. (12NC)	929001249502
Net weight (piece)	0.160 kg




Dimensional drawing

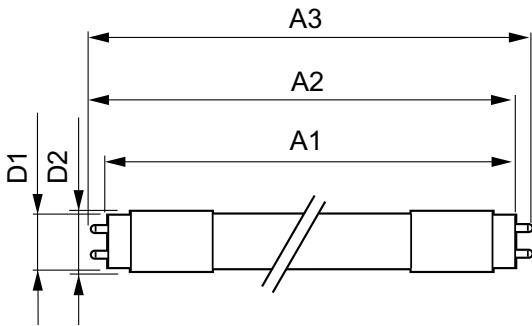

CorePro LEDtube HF 600mm 9W840 T8 G

Product	D1	D2	A1	A2	A3
CorePro LEDtube HF 600mm 9W840 T8 G	27.9 mm	28 mm	589.8 mm	595.7 mm	604 mm

Photometric data

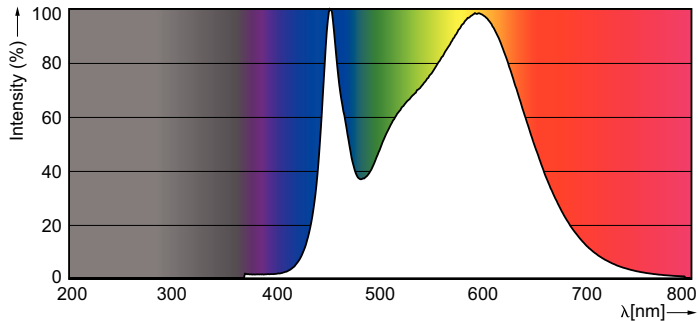

CorePro LEDtube InstantFit HF

