

36W LED BACKLIT PANEL LIGHT

UGR< 19

| 600x600x32mm | TP(a)

SKU: PB6X636WU196K

INFORMATION

Measuring 595mm x 595mm x 32mm, this new LUMiLiFe 36W Backlit LED panel low glare (UGR<19) light typically replaces 4 x 600mm T8/T5 fluorescent tubes lights set in 600x600 grids. Which is why they're the popular lighting choice for hotels, factories, offices, schools, colleges, hospitals and the like. Energy use will be reduced by up to 50% and you'll notice a dramatic improvement in light quality.

FEATURES

- Lumens: 3600 +/- 5%
- Beam angle: 90 Degree
- Lifespan: 50,000Hrs
- IP Rating: IP20
- Unified Glare Rating (UGR): <19**
- CE & RoHS Certified
- Uniform Light Distribution
- TP(a)
- Non-Flicker Driver
- Screwless Quick Connector

**this panel allows the installation to comply with EN12464

TECHNICAL PARAMETER

- Input: AC 220-240V 50/60Hz 950ma
- Output Current: DC 30-42V
- LED Type: SMD
- Output Power: 36W
- Lens Material: PMMA
- Diffuser Material: PS
- Samsung LED SMD Chip 2835



LUMiLiFe is constantly developing and improving its products. For this reason, all product descriptions are intended as a general guide and we may change specifications time to time in the interest of product development, without prior notification or public announcement. Data in this sheet has been obtained in controlled experimental conditions. However, LUMiLiFe cannot accept any liability arising from the reliance on such data to the extent permitted by law.

APPLICATIONS


- Hotels
- Conference/Meeting rooms
- Factories and offices
- Schools, colleges, universities and hospitals



SPECIFICATIONS

Model #	CCT	LED Type	Lumen (Lm) (±5%)	CRI	Beam Angle	Voltage (V)	PF	Weight (Kg)
PB6X636WU196K	6000K	SMD	3600 Lm	>80	90°	AC 220-240V	>0.9	2

DIMENSIONS (MM)

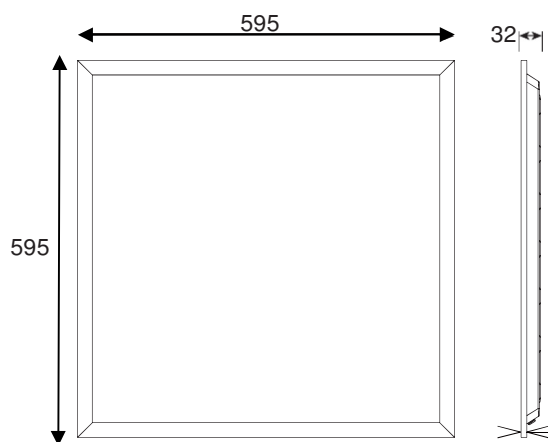

All dimension tolerances
are ± 0.5 mm unless
otherwise stated.

ACCESSORIES

- Hanging Kit for suspended installation
- Spring Clips
- Surface Mounted Clips
- External 3hr Emergency Pack (UK Manufactured)