

6W Hawthorn led downlight range

Features In Brief:

1. Energy saving exceeding 60%
2. Uniformed light distribution
3. Original epistar chips
4. Instant start, no flicking, no humming
5. Dali/1-10v/DSI versions available
6. 3 year warranty
7. CE, RoHS , FCC and WEEE certificates



Heathfield LED downlights are designed to replace the traditional PL downlights commonly seen within offices and communal areas. The solid construction of this unit offers both uniformed light distribution as well as maintenance free operation. The downlight comes prewired with driver and has dimming options for 1-10v/DALI/DSI. Using original Epistar chips this unit is truly a fit and forget solution.


| Part Number | Colour | Luminous Flux |
|----------------|--------|---------------|
| HDL6/HAW/6000k | 6000K | 380 lm |
| HDL6/HAW/4000K | 4000K | 360 lm |
| HDL6/HAW/3000K | 3000K | 310 lm |

6W led Hawthorn downlight Product Features

6w Range

| Item | HDL6/HAW/6000K | HDL6/HAW/4000K | HDL6/HAW/3000K |
|-----------------------|-----------------|-----------------|-----------------|
| Input voltage | 100-240V | 100-240V | 100-240V |
| Power consumption | 6W | 6W | 6W |
| Colour temperature | Daylight | Cool white | Warm white |
| Life time | >50,000 Hour | >50,000 Hour | >50,000 Hour |
| Operating temperature | -10°C to + 65°C | -10°C to + 65°C | -10°C to + 65°C |
| Storage temperature | -10°C to + 60°C | -10°C to + 60°C | -10°C to + 60°C |
| Lumen | 380lm | 360lm | 310lm |
| Beam angle | 100° | 100° | 100° |
| Outer dimensions | Ø120x12mm | Ø120x12mm | Ø120x12mm |
| Cut out size | 108mm | 108mm | 108mm |
| IP Rating | IP22 | IP22 | IP22 |
| CRI | >80 | >80 | >80 |

Chromaticity Diagram

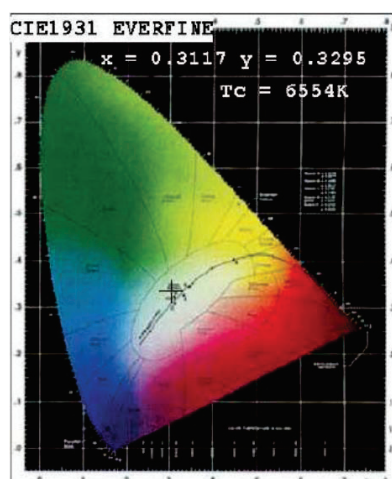

Product dimensions

