



HDLPC9

Features In Brief

1. Energy saving exceeding 60%
2. Uniformed light distribution.
3. Original Epistar chips
4. Instant start, no flicking, no humming.
5. DALI/1-10V/DSI Versions available
6. 3 year warranty




LED ThermaLED downlights are designed to replace the traditional PL downlights commonly seen within offices and communal areas. The solid construction of this unit offers both uniformed light distribution as well as maintenance free operation. The downlight comes prewired with driver and has dimming options for 1-10v/DALI/DSI. Using original Epistar chips this unit is truly a fit and forget solution

PART NUMBER	COLOUR	LUMINOUS FLUX
HDLPC9	6000K	680 lm
HDLPC9	4000K	650 lm
HDLPC9	3000K	600lm

DOWNLIGHT PRODUCT FEATURES

9W RANGE			
ITEM	HDLPC9	HDLPC9	HDLPC9
Input Voltage	100~240V	100~240V	100~240v
Power Consumption	9 W	9 W	9 w
Colour	Daylight	Cool White	Warm White
Colour Temperature	6000k	4000k	3000k
Life Time	>50,000 Hour	>50,000 Hour	>50,000 Hour
Operating Temperature	-40°C to + 65°C	-40°C to + 65°C	-40°C to + 65°C
Storage Temperature	-30°C to + 60°C	-30°C to + 60°C	-30°C to + 60°C
Lumen*	680lm	650lm	600lm
Certificates	CE, RoHS, FCC, WEEE	CE, RoHS, FCC,WEEE	CE, RoHS, FCC, WEEE
Beam Angle	110°	110°	110°
Outer Dimensions	Ø142 x 26mm	Ø142x 26mm	Ø142 x 26mm
Cut out Size	125mm	125mm	125mm
CRI	80	80	80
IP Rating	IP54	IP54	IP54

CHROMATICITY DIAGRAM

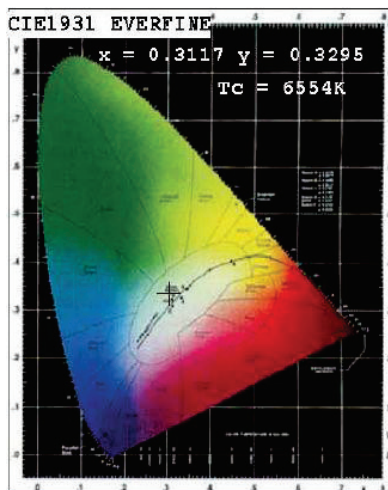

LUX LEVELS

