MASTER LEDspot MV

MAS LED spot VLE DT 3.7-35W GU10 927 36D

Delivering a warm, halogen-like accent beam, MASTER LEDspot MV is a perfect fit for spot lighting (track, corridors, lift lobbies, display cases and cabinets) in the hospitality industry. It is particularly suitable to public areas where the light is on 24/7, such as lobbies, corridors, stairwells. MASTER LEDspot MV delivers huge energy savings and minimises maintenance cost without any compromise on brightness, enabling hospitality owners to achieve a return on their investment within one year. These LEDspots are compatible with most existing fixtures with a GU10 holder and designed as a retrofit replacement for halogen or incandescent spots. The dimmable versions drive further efficiencies, while helping to create the desired atmosphere. For environments where the right atmosphere needs to be created (e.g. bars and restaurants), the “DimTone” feature could be useful. This is a LED feature that creates a warmer tone once light is dimmed down to lower intensities.

Product data

General Information	
Cap base	GU10 [GU10]
Nominal lifetime (nom.)	25000 h
Switching cycle	50000X
Technical type	3.7-35W

Light Technical	
Beam Angle (Nom)	36 °
Luminous flux (nom.)	260 lm
Luminous flux (rated) (nom.)	260 lm
Luminous intensity (nom.)	500 cd
Colour designation	Warm white (WW)
Rated beam angle	36 °
Correlated colour temperature (nom.)	2200-2700 K

Luminous efficacy (rated) (nom.)	78.38 lm/W
Colour consistency	<6
Color rendering index (nom.)	90
LLMF at end of nominal lifetime (nom.)	70 %
Luminous Flux in 90° Cone (Rated)	260 lm

Operating and Electrical	
Input frequency	50 to 60 Hz
Power (Rated) (Nom)	3.7 W
Lamp current (nom.)	20 mA
Wattage equivalent	35 W
Starting time (nom.)	0.5 s
Warm-up time to 60% light (nom.)	0.5 s
Power factor (nom.)	0.8

MASTER LEDspot MV

Voltage (Nom)	220-240 V
Temperature	
T-Case maximum (nom.)	80 °C
Controls and Dimming	
Dimmable	Yes
Approval and Application	
Suitable for accent lighting	Yes
Energy efficiency label (EEL)	A+
Energy Consumption kWh/1000 h	4 kWh

Product Data	
Full product code	871869670809500
Order product name	MAS LED spot VLE DT 3.7-35W GU10 927 36D
EAN/UPC – product	8718696708095
Order code	70809500
Numerator – quantity per pack	1
Numerator – packs per outer box	10
Material no. (12NC)	929001350002
Net weight (piece)	0.038 kg

Warnings and Safety

- Operating temperature range is between -20° C and 45° C ambient
- Only to apply in dry or damp locations and most of open fixtures with lamp-holders that offer sufficient space (10 mm free air space)
- Not intended for use with emergency light fixtures or exit lights

Dimensional drawing



GU10 230V4W-35W230lm36D 22-2700K GU10Dim

Product	D	C
MAS LED spot VLE DT 3.7-35W GU10 927 36D	50 mm	54 mm

Photometric data

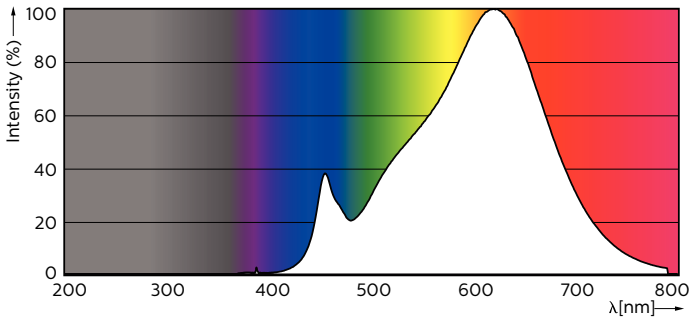

MASTER LEDspotMV GU10 927 36D



MASTER LEDspotMV 35W GU10 922-927 36D

MASTER LEDspot MV

Photometric data



Lifetime

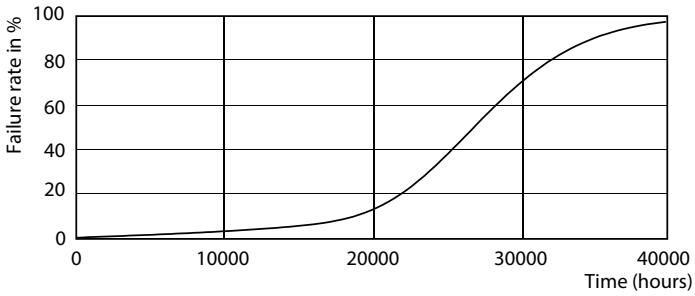

MASTER LEDspotMV GU10 922-927 36D

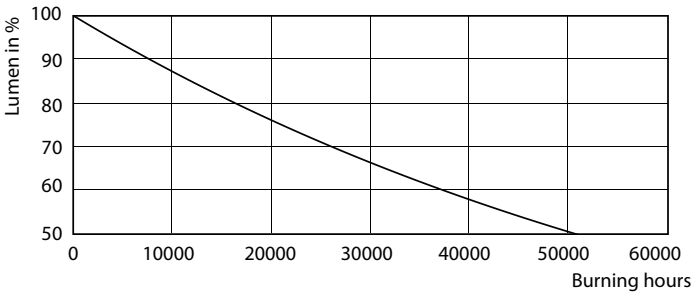

MASTER LEDspotMV GU10 922-927 36D

© 2018 Philips Lighting Holding B.V. All rights reserved. Philips Lighting reserves the right to make changes in specifications and/or to discontinue any product at any timewithout notice or obligation and will not be liable for any consequences resulting from the use of this publication.