

PRODUCT DATASHEET

PANEL 600 DALI UGR<19 36 W 3000 K MP WT

PANEL 600 DALI UGR < 19 | Square edge-lit panel luminaires with DALI driver, low glare, 600 mm



AREAS OF APPLICATION

- Direct replacement for luminaires with fluorescent lamps
- Corridors
- Offices
- Conference rooms
- Reception areas
- Foyers
- Suitable for recessed ceiling systems with grid size of 600 x 600 mm

PRODUCT BENEFITS

- Good glare reduction (UGR < 19)
- Energy savings of up to 50 % (compared to luminaires that use fluorescent lamps)
- Advanced functionality due to already included DALI driver
- DALI driver with individual luminaire current set-up already installed
- Light guide plate with micro structure made of non-yellowing material for long lifetime
- Easy and quick installation
- 5 years guarantee

PRODUCT FEATURES

- Lifetime (L80/B50): up to 60,000 h (at 25 °C)
- Aluminum housing, polystyrene diffuser
- High luminous efficacy: up to 120 lm/W
- Initial color consistency: < 4 SDCM
- Ambient temperature in operation: -10...+40 °C



- Type of protection: IP20

TECHNICAL DATA

Electrical data

Nominal wattage	36.00 W
Operating mode	Electronic control gear (ECG)
Nominal voltage	220...240 V
Mains frequency	0/50/60 Hz
Power factor λ	>0.90

Luminaire control gear data

ECG - Life time	100000 h
ECG - Length	150 mm
ECG - Width	43 mm



Photometrical data

Color temperature	3000 K
Color rendering index Ra	>80
Light color (designation)	Warm White
Luminous flux	4320 lm
Luminous efficacy	120 lm/W
Standard deviation of color matching	<4 sdc _m

Light technical data

Beam angle	90.00 °
UGR lateral	<19
UGR longitudinal	<19

Dimensions & weight

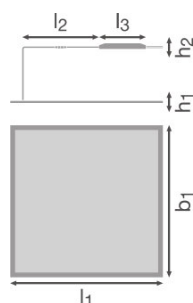

Length	595.0 mm
--------	----------

Width	595.0 mm
Height	12.2 mm
Product weight	3250.00 g
Mounting width	575 mm
Mounting length	575 mm

Colors & materials

Housing color	White
Product color	White
Body material	Aluminum
Cover material	Polymethylmethacrylate (PMMA)

Temperatures & operating conditions

Ambient temperature range	-10...40 °C
----------------------------------	-------------

Lifespan

Lifespan L70 at 25 °C	70000 h
Lifespan L80 at 25 °C	60000 h
Lifespan L90 at 25 °C	35000 h

Additional product data

Mounting type	Recessed/Suspended/Surface
Mounting location	Ceiling / Wall



Capabilities

Dimmable	Yes
Type of connection	Screwless terminal, 5-Pole
LED module replaceable	Not replaceable

Certificates & standards

Type of protection	IP20
Protection class	II
Protection class IK (shock resistance)	IK03
Glow Wire Test according to IEC 695-2-1	650 °C
Photobiological safety group EN62778	RG 0
Standards	CE/CB/TÜV SÜD/EAC/RoHS

Light Distribution

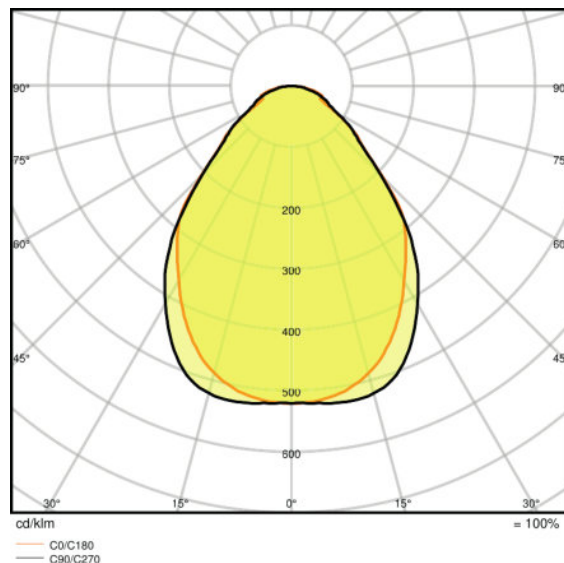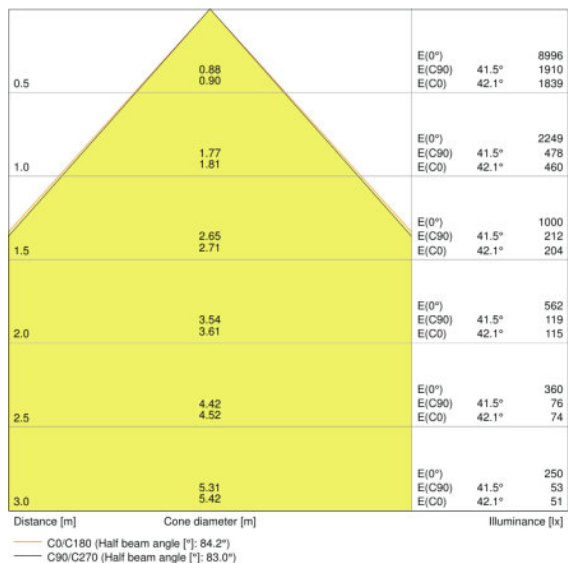

LDC typ cone

LDC typ polar

EQUIPMENT / ACCESSORIES

- Accessories for several mounting options available
- Security rope for luminaire included
- External control gear included

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075113282	Folding carton box 1	655 mm x 708 mm x 41 mm	3628.00 g	19.01 dm ³
4058075113299	Shipping carton box 4	720 mm x 195 mm x 669 mm	15461.00 g	93.93 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

REFERENCES / LINKS

For Guarantee see
[▶ www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.