



CorePro LED PLL

CorePro LED PLL CorePro LED PLL HF 16.5W 840 4P 2G11

Philips CorePro LED PLL is the ideal uplamping solution for downlights & luminaires in a wide range of general lighting applications. It integrates a LED light source into a traditional fluorescent form factor to offer superb energy savings over a lifetime that's twice as long as fluorescent alternatives.

Product data


General Information		Starting Time (Nom)	
Cap-Base	2G11 [2G11]		0.5 s
Nominal Lifetime (Nom)	30000 h	Warm Up Time to 60% Light (Nom)	0.5 s
Switching Cycle	50000X	Voltage (Nom)	53-77 V
B50L70	30000 h		
Light Technical		Temperature	
Color Code	840 [CCT of 4000K]	T-Ambient (Max)	45 °C
Luminous Flux (Nom)	2100 lm	T-Ambient (Min)	-20 °C
Luminous Flux (Rated) (Nom)	2100 lm	T-Storage (Max)	60 °C
Correlated Color Temperature (Nom)	4000 K	T-Storage (Min)	-40 °C
Color Consistency	<6	T-Case Maximum (Nom)	70 °C
Color Rendering Index (Nom)	83		
LLMF At End Of Nominal Lifetime (Nom)	70 %	Controls and Dimming	
		Dimmable	No
		Mechanical and Housing	
		Product Length	400 mm
		Approval and Application	
		Energy Saving Product	Yes
		Energy Efficiency Label (EEL)	A+
Operating and Electrical			
Input Frequency	39000-71000 Hz		
Power (Rated) (Nom)	16.5 W		
Lamp Current (Max)	420 mA		
Lamp Current (Min)	290 mA		

CorePro LED PLL

Approval Marks	TUV CE marking RoHS compliance KEMA Keur certificate
Energy Consumption kWh/1000 h	20 kWh
Product Data	
Full product code	871869673974700
Order product name	CorePro LED PLL CorePro LED PLL HF 16.5W 840 4P 2G11

EAN/UPC - Product	8718696739747
Order code	929001381602
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929001381602
Net Weight (Piece)	0.160 kg



Dimensional drawing

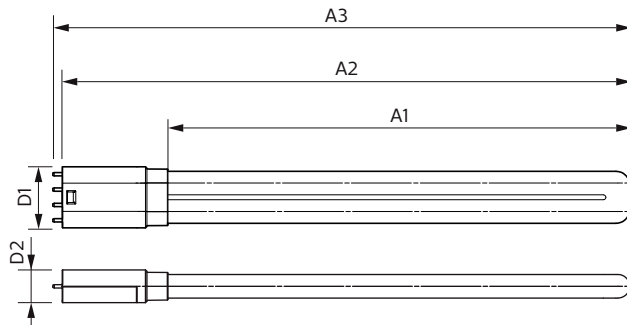


PLED 230V 16-36W 2100lm 4000K 2G11

Product	D1	D2	A1	A2	A3
CorePro LED PLL CorePro LED PLL HF 16.5W 840 4P 2G11	43.6 mm	23.4 mm	329.5 mm	405 mm	411.6 mm

Photometric data

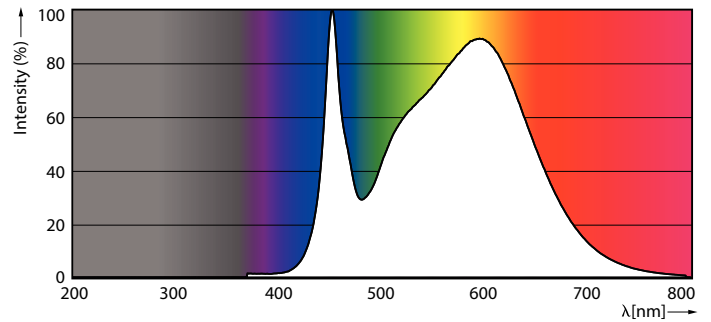



LEDtube PLC 400mm 16-5W 2G11 840 2100lm



LEDtube PLC 400mm 16-5W 2G11 830 2000lm



CorePro LED PLL

Lifetime

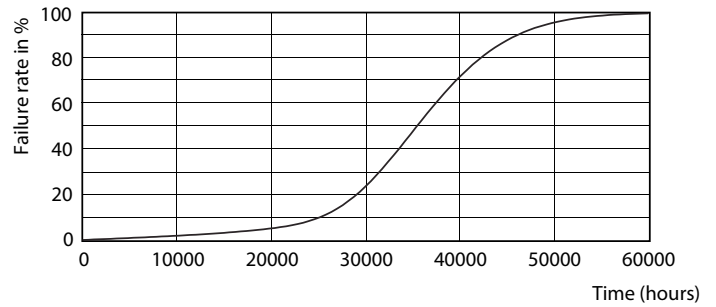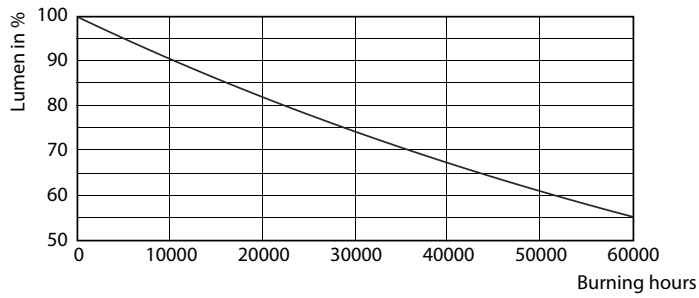


LEDtube PLC 400mm 16-5W 2G11 830 2000lm

LEDtube PLC 400mm 16-5W 2G11 830 2000lm

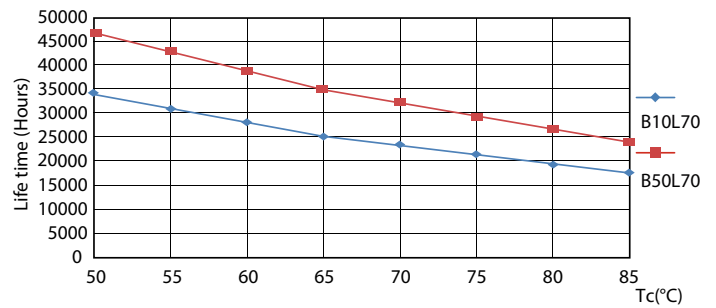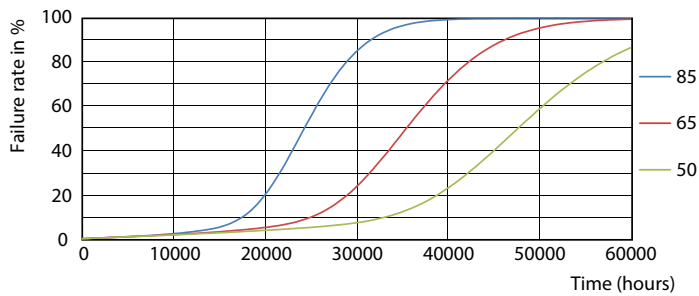

LEDtube PLC 400mm 16-5W 2G11 830 2000lm

LEDtube PLC 400mm 16-5W 2G11 830 2000lm

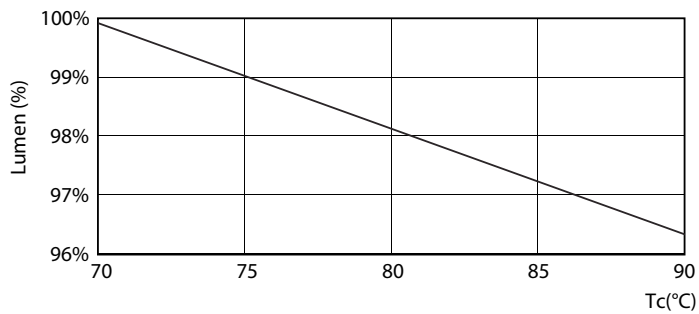

LEDtube PLC 400mm 16-5W 2G11 830 2000lm

