

LED Test Report

Product Mark

Product Type :SH26-30W


Temperature :admin'C

Operator :admin

Manufacturer :admin

Humidity :65%

Test Date :2019-06-13 13:41:15

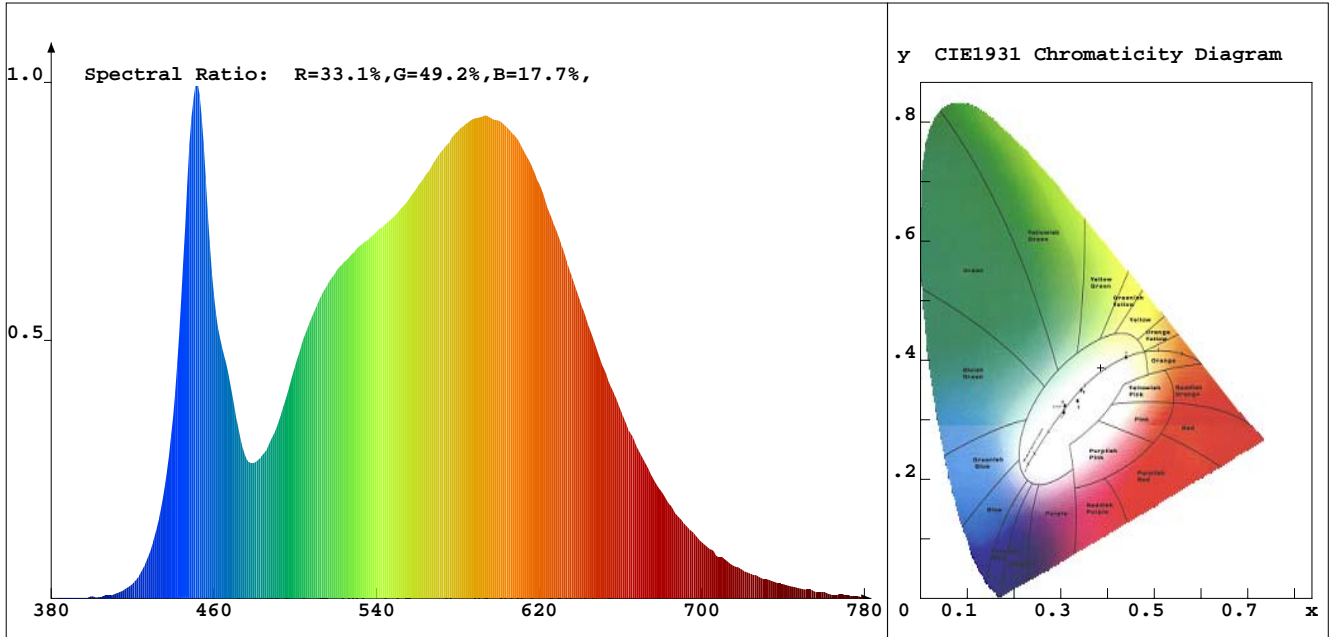

Chroma Parameters

Chro.Coor.:x=0.3850 y=0.3872 u=0.2239 v=0.3379 duv=0.0035

CCT: 3957K Dominant Wave.:577.5nm Purity:31.8%

Flux RGB Ratio:R=18.1%,G=79.6%,B=2.3% Peak Wave:451.6nm Half Width:20.3nm

Rending Index:Ra= 82.2

| | | | | | | | |
|--------|--------|--------|--------|--------|--------|--------|--------|
| R1 =80 | R2 =88 | R3 =96 | R4 =81 | R5 =80 | R6 =85 | R7 =86 | R8 =62 |
| R9 =3 | R10=73 | R11=80 | R12=59 | R13=82 | R14=98 | R15=73 | |

Photo Parameters

Flux:4431.99lm Effi.:148.5lm/W Radiant:10613.2mW Iv:0.0mcd

Ele. Parameters

Voltage:U=220.500V

Current:I=0.1420A

Power:P=29.85W

Power Factor:PF=0.949

Instrument state

Instrument:Hopoo HP8000S

Integral Time: 28.042ms

VPeak: 14567

VDark: 1193

Scan Range: 380-780nm

Product ID: 201302272