Verbatim LED Slim Downlight 220mm 25W 3000K 2250lm

Verbatim LED recessed downlights for general lighting offer a uniform, homogeneous light distribution. They come in four different diameters and are easy to integrate. They are compact in size and possess an external power supply. The white housing ensures discreet integration in ceilings.

Full metal housing guarantees efficient thermal management. 40,000 hours lifetime and excellent energy efficiency makes it a perfect replacement for downlights containing compact fluorescent lamps.

Dimming options available with corresponding dimmable drivers.

Product Number: 52268

Product Information

- Energy efficient alternative to CFL downlights
- 40 000 hours lifetime (L70B50)
- Light output of 2250lm
- 3000K warm white light
- Reduced mounting height / Ceiling thickness: 5-18mm
- PC diffuser passing 850° glow wire test
- Dimmable
- 5 Years Warranty

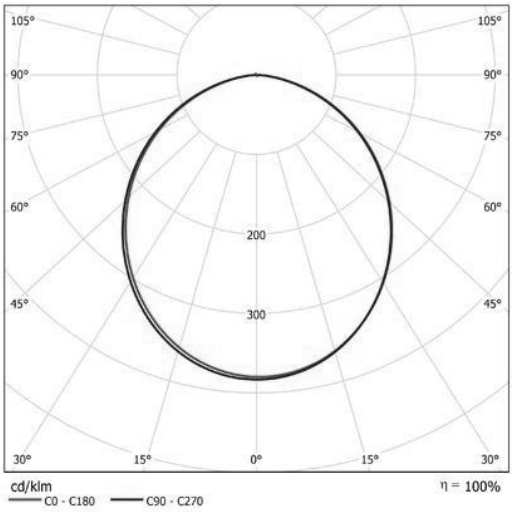
105°
105°
90°
90°
75°
75°
60°
60°
200
45°
45°
300
30°
15°
0°
15°
30°
cd/klm
η = 100%
C0 - C180
C90 - C270

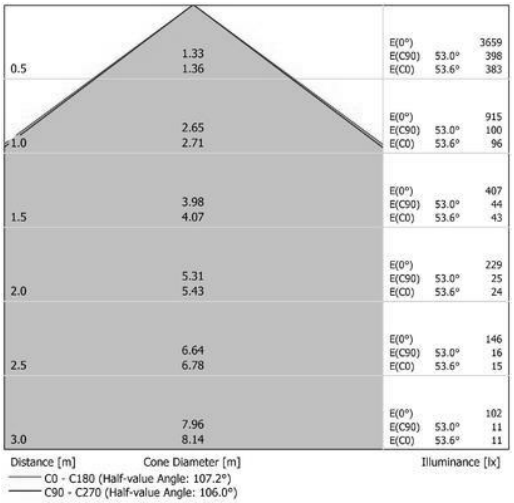
0.5
1.33
1.36
E(0°) 3659
E(C90) 53.0° 398
E(C0) 53.6° 383
1.0
2.65
2.71
E(0°) 915
E(C90) 53.0° 100
E(C0) 53.6° 96
1.5
3.98
4.07
E(0°) 407
E(C90) 53.0° 44
E(C0) 53.6° 43
2.0
5.31
5.43
E(0°) 229
E(C90) 53.0° 25
E(C0) 53.6° 24
2.5
6.64
6.78
E(0°) 146
E(C90) 53.0° 16
E(C0) 53.6° 15
3.0
7.96
8.14
E(0°) 102
E(C90) 53.0° 11
E(C0) 53.6° 11
Distance [m]
Cone Diameter [m]
Illuminance [lx]
C0 - C180 (Half-value Angle: 107.2°)
C90 - C270 (Half-value Angle: 106.0°)

Verbatim
LED
Recessed Downlight

Verbatim
LED
Recessed Downlight

Verbatim
LED
Recessed Downlight

verbatim
LED
Recessed Downlight

Verbatim Europe - www.verbatim-europe.com