




NEW FOR 2015! LED T8 Full Glass Tube


LED T8 full glass tube with internal diffused coating providing 320° light output. Energy saving with low power consumption. Includes LED starter for direct retrofit into existing luminaires.

- 40,000 hour life
- 15,000 switching cycles
- 4000K cool white colour
- Instant full light
- Standard 2ft, 3ft, 4ft or 5ft T8 lengths
- Not suitable for dimming
- No mercury or hazardous materials
- No warping, no bending
- No discolouration of output over life of tube
- Single ended circuit for risk free installation

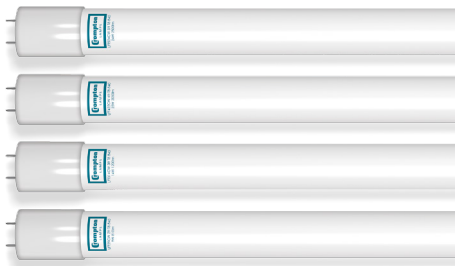


Product Code	Watts (W)	Volts (V)	Cap	Colour Appearance	Colour Temp (K)	Initial Lumens (lm)	Beam Angle	Average Rated Life (hrs)	Dimensions (mm)		Order Qty
									Dia	L	
Single Carton											
LFT29CW	9	240	G13	Cool White	4000	810	320°	40,000	26	602	1
LFT314CW	14	240	G13	Cool White	4000	1200	320°	40,000	26	906	1
LFT422CW	22	240	G13	Cool White	4000	2050	320°	40,000	26	1212	1
LFT524CW	24	240	G13	Cool White	4000	2500	320°	40,000	26	1513	1



Installation Instructions:



Magnetic Ballasts:
Remove old fluorescent starter and tube and insert LED glass tube and included LED starter.



High Frequency Ballasts:
Remove old fluorescent starter and bypass ballast by rewiring directly to AC, only to be carried out by qualified electrician.



G13 Cap

