

# VersaPanel



The VersaPanel is a high performance IP44 LED 600x600 flat panel luminaire that offers significant energy and maintenance savings.

Sleek minimalist design, the VersaPanel is a direct equivalent to a traditional fluorescent solution with reduced energy consumption.

Suitable for a wide range of applications where cost effective slim line lay-in solution is desired.

- Even lit appearance
- Easy to clean IP44 wipeable surface
- 3400 lumen output
- 4000K or 5000K colour temperature options
- Approximately 40% less energy usage than an equivalent 4 x 18W fluorescent
- Simple installation, low profile lay-in solution with plug/socket driver connection
- Efficacy of 93 Llm/cW
- ENEC driver, DALI option

## 1

### Light Engine and Control Gear Options


- 5000K or 4000K high output, high efficiency optimised LED panel illumination, >80CRI
- Fixed output LED driver (ENEC) as standard, DALI option available
- Emergency, 3hr duration option available

### Materials

- Housing back plate – steel
- Panel frame – extruded aluminium in white finish
- Panel optic – diffuse opal polypropylene

### Installation Notes

- Suitable for exposed 'T' ceilings, lay-in installation
- Remote driver on plug and socket connection
- Mains connection is direct to the driver as standard
- The luminaire panels are IP44 rated. Please note the driver and gearbox are IP20 rated

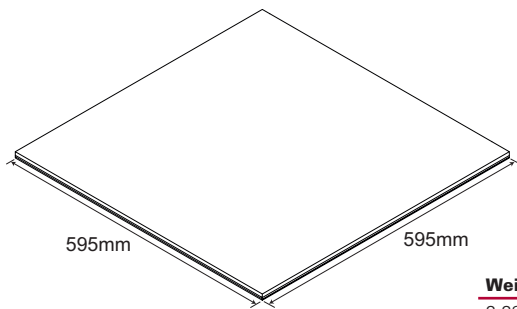


### Specification

To specify state; Flat panel edge lit LED, IP44 rated, with diffuse opal polypropylene panel, extruded aluminium in white finish, plug/socket connection mains to ENEC driver (IP20) as Eaton's VersaPanel range, part no \_\_\_\_\_

### Photometric Data

Cat. No: VSTPP66344KZ / VSTPP66345KZ

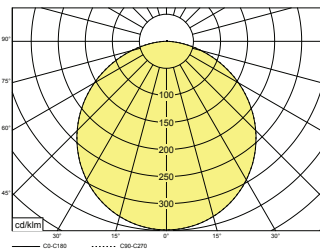

LOR 100%  
DLOR 100%  
ULOR 0%  
SHR max 1:1.46  
SHR nom 1-1.25

Utilisation factors / TM5

Reflectances			Room index								
C	W	F	0.75	1	1.25	1.5	2	2.5	3	4	5
0.7	0.5	0.2	56	67	74	79	87	92	95	100	103
0.7	0.3	0.2	48	59	66	72	80	86	90	96	99
0.7	0.1	0.2	42	53	61	67	75	81	86	92	96
0.5	0.5	0.2	54	64	71	77	84	88	92	96	99
0.5	0.3	0.2	47	58	65	70	78	84	87	92	96
0.5	0.1	0.2	42	52	60	66	74	79	84	89	93
0.3	0.5	0.2	53	63	69	74	81	85	88	92	95
0.3	0.3	0.2	47	57	64	69	76	81	85	89	92
0.3	0.1	0.2	42	52	59	65	72	78	82	87	90
0	0	0	40	49	56	61	69	74	78	82	86
BZ-class			5	5	5	5	5	5	5	5	5

### Catalogue Numbers

Cat No	Description	Nominal Lumens	Circuit Watts (W)	Lumen output	Luminaire Efficiency (Llm/cW)	Colour Temperature °K	Weight	Power Factor
VSTPP66344KZ	VersaPanel 3400lm 4000K	3400	37	3400	91.9	4000K	2280g	>.95
VSTPP66345KZ	VersaPanel 3400lm 5000K	3400	37	3373	91.2	5000K	2280g	>.95

For emergency option add characters **EL** in from of the Cat No, example VSTPP66345KZ becomes **ELVSTPP66345KZ**

For DALI option replace characters **KZ** with **DD** example VSTPP66345KZ becomes VSTPP66345**DD**

DALI Emergency option would be **ELVSTPP66345DD**