



Certaline Halogen Transformers

Certaline 150W 230-240V 50/60Hz

Electronic halogen transformer for low voltage halogen lamps the range include Certaline 60W 230-240V and Certaline105W 230-240V

Product data

• General Characteristics

Rated Number of Lamps	3 piece
Rated Ballast-Lamp Power	50-150
Rated Lamptype	LV Halogen
Line Voltage	230-240 V
Line Frequency	50/60 Hz
Lifetime 90% surv.@Tcaselife	20000 hr

• Operating Characteristics

Power Consumption Range	50-150 W
Ballast Efficiency Factor	0.95 -

• Temperature Characteristics

T-case life	65 C
T-case maximum	75 (max) C

• Product Dimensions

Length A1	180.0 mm
-----------	----------

Width B1	46.0 mm
Height C1	36.0 mm

• Approval & Application Chars




Approval marks	VDE / SELV
CE marking	Yes

• Product Data

Order code	913852 30
Full product code	871150091385230
Full product name	Certaline 150W 230-240V 50/60Hz
Order product name	Certaline 150W 230-240V 50/60Hz
Pieces per pack	1
Packing configuration	50
Packs per outerbox	50
Bar code on pack - EAN1	8711500913852
Bar code on outerbox - EAN3	8711500913869
Logistic code(s) - 12NC	913700634091
Net weight per piece	0.245 kg

Dimensional drawing

Product	A1 (Norm)	B1 (Norm)	C1 (Norm)
Certaline 150W 230-240V 50/60Hz	180.0	46.0	36.0

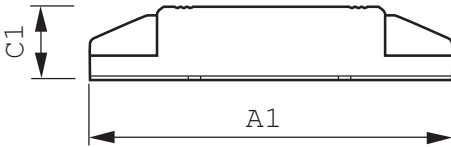

© 2011 Koninklijke Philips Electronics N.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

www.philips.com/lighting

2011, November 3
data subject to change