

**4 Years**  
Product Warranty  
UK Only

**2 Years**  
On-Site Warranty  
Main-land UK Only



# UEM Pro

07479 UEM04

## 4W Universal Emergency Module Pro

- Standard/Self-test
- Built-in cable clamp, push to release
- Built-in loop-in loop-out terminals for 2 x 3-core cables
- Loop-in and loop-out push-wire terminals
- Built-in self-test function according to BS-EN-62034-2012
- Designed for use with all LED luminaires (class III) with external driver
- Easy Plug & Play installation
- For maintained or non-maintained emergency lighting systems
- Internal Li-ion battery with improved lifespan
- Easy battery replacement



### Overview

The Universal Emergency Module (UEM) with available Automatic Self-Test (AST) version is suitable for class III luminaires with integrated LEDs and separate LED drivers. Provides an operation time of three hours. The UEM can be installed within a luminaire or within the ceiling void.



IP20



### General Information

|                    |          |
|--------------------|----------|
| IP Rating          | IP20     |
| Installation Area  | Internal |
| UEM/EME Protection | Class II |

### Technical Summary

|                                      |                              |
|--------------------------------------|------------------------------|
| Product Code                         | UEM04                        |
| Weight                               | 0.35Kg                       |
| Dimensions (L x W x D) (mm)          | 211x91x32                    |
| UEM/EME Battery Life                 | 4 y                          |
| UEM/EME Input Voltage                | 220-240Vac 50/60Hz           |
| UEM/EME Ambient Temperature Range    | 0°C to 45°C                  |
| Emergency Modes                      | Maintained or Non-maintained |
| UEM/EME Test Function                | Manual                       |
| UEM/EME Protection                   | Class II                     |
| UEM/EME Weight                       | 0.365 kg                     |
| UEM/EME Battery Output Wattage (max) | 4 W                          |
| UEM/EME Dimensions (L x W x D) (mm)  | 211x91x32                    |
| UEM/EME Emergency Operation Test     | Manual                       |

Tel: 01635 523 713

Email: [sales@kosnic.com](mailto:sales@kosnic.com)

[Kosnic.com](http://Kosnic.com)



Kosnic Lighting KosnicUK KosnicLightingUK KosnicUK

**4** 4 Years  
Product Warranty  
UK Only

**2** 2 Years  
On-Site Warranty  
Main-land UK Only

# UEM Pro



07479 UEM04

## Accessories

| Product Code | Description                              | Type    |
|--------------|------------------------------------------|---------|
| BAT26LI2     | Li-ion Battery Pack 2600mAh for UEM04/DA | Battery |

## Overview

The Universal Emergency Module (UEM) with available Automatic Self-Test (AST) version is suitable for class III luminaires with integrated LEDs and separate LED drivers. Provides an operation time of three hours. The UEM can be installed within a luminaire or within the ceiling void.




IP20




## General Information

|                    |          |
|--------------------|----------|
| IP Rating          | IP20     |
| Installation Area  | Internal |
| UEM/EME Protection | Class II |

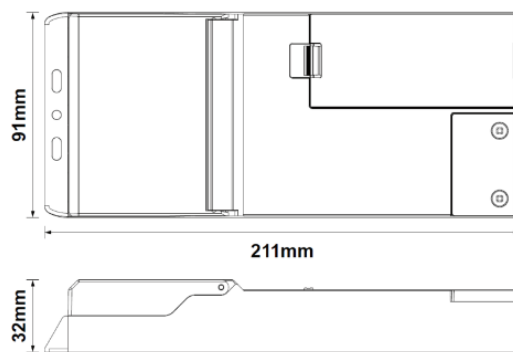

## Wiring Schematic

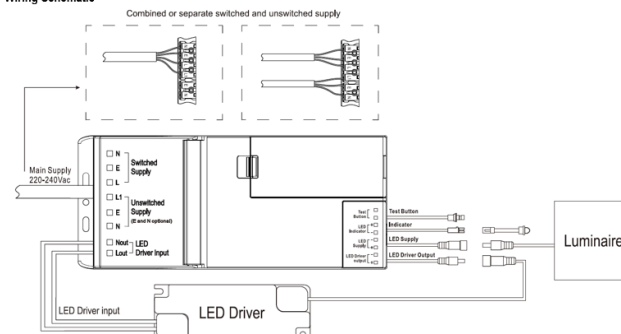

Tel: 01635 523 713

Email: [sales@kosnic.com](mailto:sales@kosnic.com)

[Kosnic.com](http://Kosnic.com)



Kosnic Lighting KosnicUK KosnicLightingUK KosnicUK