

50 36° 5,5 W/827

LED STAR PAR16 | LED reflector lamps PAR16 with retrofit pin base



Areas of application

- Spotighting for accents
- Display cabinets and shop windows
- Retail outlets and exhibition rooms
- Spotighting heat-sensitive objects such as food, plants, etc.
- Outdoor use in outdoor luminaires only (minimum IP65)
- Directional light sources
- Hospitality
- Shops

Product benefits

- Ideal for economical spotighting
- Alternative to line-voltage halogen lamps
- Very low energy consumption
- Extremely long life
- No UV and near-IR radiation in the light beam
- Shockproof and vibration-proof thanks to LED technology
- Efficient generation of white light
- Professional thermal management

Product features

- Professional LED lamps for line voltage
- Not dimmable
- Base: GU10
- Mercury-free lamps
- Lifetime: up to 25,000 h



Technical data

Electrical data

Rated wattage	5.50 W
Nominal wattage	5.50 W
Nominal voltage	230 V
Claimed equiv. conventional lamp power	50 W
Operating frequency	50...60 Hz
Power factor λ	0.75

Photometrical data


Luminous intensity	1000 cd
Nominal luminous flux	350 lm
Rated luminous flux	350 lm
Color temperature	2700 K
Lumen main.fact.at end of nom.life time	0.70
Light color as per EN 12464-1	Warm White
Standard deviation of color matching	≤ 6 sdcM
Nominal useful luminous flux 90°	390 lm
Rated useful luminous flux 90°	390 lm
Rated peak intensity	900 cd

Light technical data

Beam angle	36 °
Warm-up time (60 %)	< 0.50 s
Starting time	< 0.5 s
Nominal beam angle	36.00 °
Rated beam angle (half peak value)	36.00 °

Dimensions & weight

Product datasheet



Overall length	58.0 mm
Diameter	50.0 mm
Outer bulb	PAR51
Length	58.0 mm
Maximum diameter	50.0 mm

Lifespan

Nominal lamp life time	15000 h
Rated lamp life time	15000 h
Number of switching cycles	100000

Additional product data

Base (standard designation)	GU10
Lamp mercury content	0.0 mg
Mercury-free	Yes
Appropriate disposal acc. to WEEE	Yes
Footnote only for product	All technical parameters apply to the entire lamp/Due to the complex production process for light-emitting diodes, the typical values shown for the technical LED parameters are purely statistical values that do not necessarily match the actual technical parameters of each individual product, which can vary from the typical value

Capabilities

Dimmable	No
-----------------	----

Certificates & standards


Energy efficiency class	A
Energy consumption	8 kWh/1000h

Country specific categorizations

Product datasheet

ILCOS	DRPAR-7-100-240-GU10-50/36
Order reference	SPAR1650 6,5W/8

Light Distribution

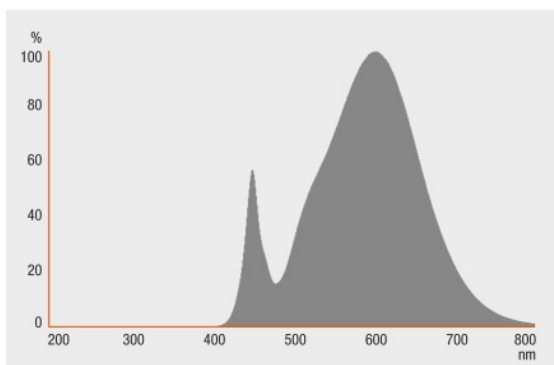

Spectral power distribution

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (height x width x length)	Volume	Gross weight
4052899910454	50 36° 5,5 W/827	Shipping carton box 6	134 mm x 154 mm x 319 mm	6.58 dm ³	711.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

References / Links

For further products and actual information concerning LED lamps see

▶ www.osram.com/ledlamps

For Guarantee see

▶ www.osram.com/guarantee

Product datasheet

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.